

Parts List

Bench Top (x1)

Bench Support (x3)

14g x 65 mm Hex Head Screw (x36)




Instructions

Step 1 Place bench slats face down on a flat surface.


Step 2 Using the 65 mm hex head screws supplied, screw the supports onto the slats, taking care not to over tighten as this could strip the thread in the plastic.

Step 3 Once all screws have been tightened turn the bench over and place into position.

Diagram

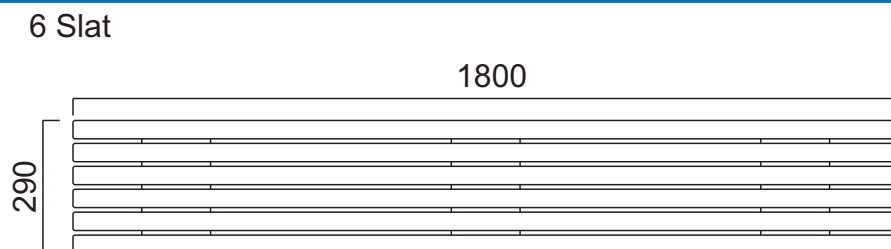

Diagram

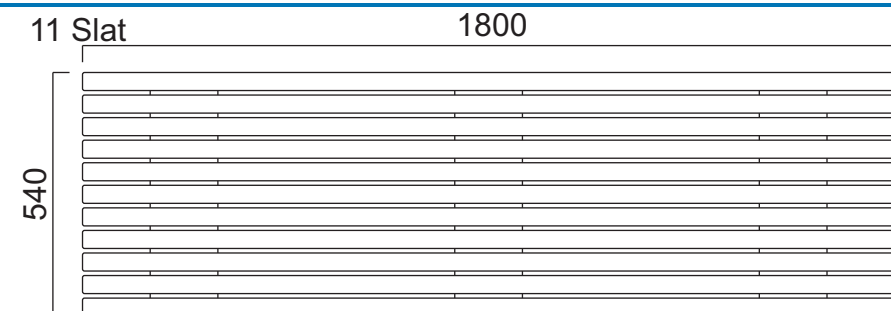

All dimensions are in millimetres (mm) unless specified.

If you require further assistance, please contact your supplier.

Rev: 2